


55/56 – HEAVY DUTY FORGED SERIES – 3,500 LB



- Drop forged (ASTM1045) 3/8" thick swivel head
- Integrally forged kingpin 1" diameter
- Lower raceway thrust bearing is a tapered roller bearing, providing exceptionally smooth and easy swiveling action and counteracts radial thrust.
- 1/2" diameter hardened ball bearings as main load bearings, with precision tapered thrust bearings
- 3/8" thick steel legs
- Zinc-plated finish
- 3/4" axle bolt with grease fitting



OTHER OPTIONS		
4-Position Lock (P)	4-Position Lock Bolt-on. Order Separately Part # 4PSL55	Toe Guard

FASTENING PATTERN			
Plate Code	Overall Size	Bolt Holes Pattern	Mounting Bolt Size
25	5-1/4 X 7-1/4	3-3/8 X 5-1/4 SLOTTED TO 4-1/8 X 6-1/8	1/2

55/56 – HEAVY DUTY FORGED SERIES – 3,500 LB

Wheel Diameter	Tread Width	Wheel Type	Load Capacity	Add options by replacing YY in part # with option designators.			Color	Overall Height	Swivel Radius
				55 Series Swivel Caster Part # To order rigid casters, change part # prefix 55 to 56.					
				Roller Bearings 24, 27	Tapered Bearing 70	Sealed Precision BB 65			
5	2-1/2	POLYON™	1400	55PU50QG2425YY			7-1/2	3-7/8	
		DUCTILE STEEL	2000	55DS50QR2425YY					
	3	YOKE ONLY		55ZZ50LZ8825YY					
6	2-1/2	POLYON™	1400	55PU50LG2425YY			G, V	5-1/2	
		RUBBER MOLD-ON IRON	600	55RS60QB2425YY					
		PHENOLIC	1600	55PH60QB2425YY					
		POLYON™	1600	55PU60Q+2425YY					
		ENERGY SAVER POLYON™	1700	55SW60QU2425YY	55SW60QU7025YY				
		ERGOLASTOMER™	2200			55HU60QI6525YY			
		IRONMAN™	3500			55NX60QB6525YY			
		SEMI-STEEL	1800	55SS60QS2425YY					
		DUCTILE STEEL	3500	55DS60QR2425YY	55DS60QR7025YY				
		ENERGY SAVER DUCTILE™	3500	55CD60QR2425YY	55CD60QR7025YY				
	IRON C41V-GROOVE	2500	55VG60QT2425YY						
	DUCTILE V-GROOVE	3500	55DV60QT2425YY	55DV60QT7025YY					
	3	YOKE ONLY		55ZZ60LZ8825YY					
		MOLD-ON RUBBER	750	55RS60LB2425YY					
		SUPREME RUBBER™	850		55RH60LS7025YY				
		PHENOLIC	2000	55PH60LB2425YY					
		POLYON™	2000	55PU60L+2425YY		55PU60LG6525YY			
		ENERGY SAVER POLYON™	2200	55SW60LU2425YY	55SW60LU7025YY				
		ULTRAPOLY™	3000	55EX60LG2425YY	55EX60LG7025YY	55EX60LG6525YY			
		TITAN™ POLYMER	3500		55PX60LO7925YY	55PX60LO6525YY			
		IRONMAN™	3500			55NX60LB6525YY			
SEMI-STEEL		2500	55SS60LS2425YY						
DUCTILE STEEL		3500	55DS60LR2425YY	55DS60LR7025YY	55DS60LG6525YY				
ENERGY SAVER DUCTILE™	3500	55CD60LR2425YY	55CD60LR7025YY						
IRON C56V-GROOVE	3500	55VG60L+2425YY							
DUCTILE V-GROOVE	3500	55DV60L+2425YY	55DV60LT7025YY	55DV60LT6525YY					
FORGED V-GROOVE	3500	55FV60LW2425YY	55FV60LW7025YY						
FORGED STEEL	3500	55FS60LS2725YY	55FS60LS7925YY						
						T, W			
						T, W			




DURABLE SUPERIOR CASTERS®

55/56 – HEAVY DUTY FORGED SERIES – 3,500 LB

Wheel Diameter	Tread Width	Wheel Type	Load Capacity	Add options by replacing YY in part # with option designators.			Color	Overall Height	Swivel Radius	
				55 Series Swivel Caster Part # To order rigid casters, change part # prefix 55 to 56.						
				Roller Bearings 24, 27	Tapered Bearing 70	Sealed Precision BB 65				
6	2 X 1.5	DW	3500			55DW60LBT425YY	8	5-1/2		
			3500			55DW60LGT425YY				
8	3	NEOPRENE ENERGIZER	1400	55EN80KB2325YY		55EN80KB8925YY	G, V	10-1/2	6-1/4	
		MOLD-ON RUBBER	850	55RS80QB2425YY						
		SUPREME RUBBER™	950			55RH80QS6525YY				
		CHAMPION™	1700			55CP80QN6725YY				
		PHENOLIC	2000	55PH80QB2425YY						
		POLYON™	2000	55PU80Q+2425YY						
		ENERGY SAVER POLYON™	2200	55SW80QU2425YY	55SW80QU7025YY					
		ERGOLASTOMER™	2300			55HU80QI6525YY				
		SEMI-STEEL	1800	55SS80QS2425YY						
		DUCTILE	3500	55DS80QR2425YY	55DS80QR7025YY					
		ENERGY SAVER DUCTILE™	3500	55CD80QR2425YY	55CD80QR7025YY					
		IRON V-GROOVE	2500	55VG80QT2425YY						
	DUCTILE V-GROOVE	3500	55DV80QT2425YY	55DV80QT7025YY						
	YOKE ONLY			55ZZ80LZ8825YY						
	MOLD-ON RUBBER	900	55RS80LB2425YY							
	SUPREME RUBBER™	1000		55RH80LS7025YY	55RH80LS6525YY					
	PHENOLIC	2500	55PH80LB2425YY							
	POLYON™	2500	55PU80L+2425YY		55PU80LG6525YY					
	ENERGY SAVER POLYON™	2400	55SW80LU2425YY	55SW80LU7025YY	55SW80LU6525YY					
	ULTRAPOLY™	3500	55EX80LG2425YY	55EX80LG7025YY	55EX80LG6525YY					
	ERGOLASTOMER™	3000			55HU80LI6525YY					
	TITAN™ POLYMER	3500		55PX80LO7925YY	55PX80LO6525YY					
	IRONMAN™	3500			55NX80LB6525YY					
	HIGH-TEMP PHENOLIC	1500	55HT80LQ2425YY							
	EPOXY	1900	55OV80LQ2425YY							
	SEMI-STEEL	2500	55SS80LS2425YY							
	DUCTILE	3500	55DS80LR2425YY	55DS80LR7025YY	55DS80LR6525YY					
	ENERGY SAVER DUCTILE™	3500	55CD80LR2425YY	55CD80LR7025YY						
	IRON C94V-GROOVE	3500	55VG80L+2425YY							
	DUCTILE V-GROOVE	3500	55DV80L+2425YY	55DV80L+7025YY	55DV80LT6525YY					
	FORGED V-GROOVE	3500	55FV80LW2425YY	55FV80LW7925YY						
	FORGED STEEL	3500	55FS80LS2725YY	55FS80LS7025YY						
	2 X 1.5	DW	3500			55DW80LBT425YY	T, W	T, W		
3500					55DW80LGT425YY					
10	3	MOLD-ON RUBBER	1000	55RS10QB2425YY			G, V	12-1/2	8	
		PHENOLIC	2500	55PH10QB2425YY						
		POLYON™	2200	55PU10Q+2425YY						
		ENERGY SAVER POLYON™	2400	55SW10QU2425YY	55SW10QU7025YY					
		SEMI-STEEL	2000	55SS10QS2425YY						
		DUCTILE	3500	55DS10QR2425YY	55DS10QR7025YY					
		YOKE ONLY			55ZZ10LZ8825YY					
		MOLD-ON RUBBER	1100	55RS10LB2425YY	55RS10LB7025YY					
		SUPREME RUBBER™	1300		55RH10LS7025YY	55RH10LS6525YY				
		PHENOLIC	3900	55PH10LB2425YY						
		POLYON™	3000	55PU10L+2425YY		55PU10LG6525YY				
		ENERGY SAVER POLYON™	3500	55SW10LU2425YY	55SW10LU7025YY					
	ULTRAPOLY™	3500	55EX10LG2425YY	55EX10LG7025YY	55EX10LG6525YY					
	ERGOLASTOMER™	3200			55HU10LI6525YY					
	TITAN™ POLYMER	3500		55PX10LO7925YY	55PX10LO6525YY					
	IRONMAN™	3500			55NX10LB6525YY					
	HIGH-TEMP PHENOLIC	2400	55HT10LQ2425YY							
	EPOXY	2400	55OV10LQ2425YY							
	SEMI-STEEL	2500	55SS10LS2425YY							
	DUCTILE	3500	55DS10LR2425YY	55DS10LR7025YY	55DS10LR6525YY					
	ENERGY SAVER DUCTILE™	3500	55CD10LR2425YY	55CD10LR7025YY						
	V-GROOVE	3500	55VG10L+2425YY							
	DUCTILE V-GROOVE	3500	55DV10L+2425YY	55DV10L+7025YY	55DV10LT6525YY					
	FORGED STEEL	3500	55FS10LS2725YY	55FS19LS7925YY						
	2 X 1.5	DW	3500			55DW10LBT425YY	T, W	T, W		
			3500			55DW10LGT425YY				

55/56 – HEAVY DUTY FORGED SERIES – 3,500 LB

Wheel Diameter	Tread Width	Wheel Type	Load Capacity	Add options by replacing YY in part # with option designators.			Color	Overall Height	Swivel Radius	
				55 Series Swivel Caster Part # To order rigid casters, change part # prefix 55 to 56.						
				Roller Bearings 24, 27	Tapered Bearing 70	Sealed Precision BB 65				
12	2-1/2	MOLD-ON RUBBER	1200	55RS12QB2425YY			G, V	15-1/2	8-1/2	
		PHENOLIC	3000	55PH12QB2425YY						
		POLYON™	2500	55PU12Q+2425YY						
		ENERGY SAVER POLYON™	3500	55SW12QU2425YY						
		SEMI-STEEL	2000	55SS12QS2425YY						
			YOKE ONLY		55ZZ12LZ8825YY					
		3	MOLD-ON RUBBER	1300	55RS12LB2425YY					
	SUPREME RUBBER™		1400		55RH12LS7025YY					
	PHENOLIC		3500	55PH12LB2425YY						
	EPOXY		2600	55OV12LQ2425YY						
	HIGH-TEMP PHENOLIC		2600	55HT12LQ2425YY						
	POLYON™		3500	55PU12L+2425YY			55PU12LG6525YY	G, V		
	ENERGY SAVER POLYON™		3500	55SW12LU2425YY	55SW12LU7025YY					
	ULTRAPOLY™		3500	55EX12LG2425YY	55EX12LG7025YY	55EX12LG6525YY				
	TITAN™ POLYMER		3500		55PX12LQ7925YY	55PX12LO6525YY				
	IRONMAN™		3500			55NX12LB6525YY				
	SEMI-STEEL		2500	55SS12LS2425YY						
	DUCTILE		3500	55DS12LR2425YY	55DS12LR7025YY	55DS12LR6525YY				
	ENERGY SAVER DUCTILE™		3500	55CD12LR2425YY	55CD12LR7025YY					
	FORGED STEEL		3500	55FS12LS2725YY	55FS12LS7925YY					

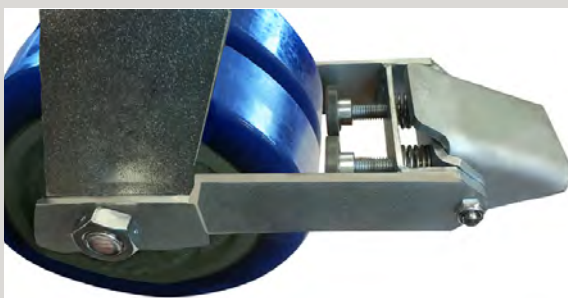

**FIELD INSTALLABLE
BRAKES ARE NOW
AVAILABLE!**

Please turn to page number 173 to view all available brake options.