



S7 / S8 / S9 Total-Lock Stainless Steel Series

Durable Superior Casters®



Stainless Steel

This is the total-lock stainless steel version of our 17 / 18 /19 Series, all metal parts are made of 304 stainless steel, especially made for sanitary applications and long service life; offering exceptional resistance against rust and corrosion and are 100% washable. Total-lock brake design provides a way to simultaneously lock both the swivel raceway and the wheel with the depression of a single pedal; making the unit stationary. These casters are commonly used in the following industries: food processing, food service, laboratories, hospitals, institutions, pharmaceutical plants, and other “clean” applications that require casters to be washed down on a frequent basis.

- Total-lock brake simultaneously locks both the swivel & wheel making the rolling unit stationary and more stable than when using just wheel brakes.
- All metal parts are 100% 304 Stainless Steel.
- Stainless Steel extends service life & offers resistance against rust & corrosion.
- Double ball raceways offer improved swiveling action and durability.
- Fork and leg assembly designed and formed for maximum durability and long term service.
- NSF Listed.



Brake Options for S9 Series



Tech Lock Pedal Brake (H)



Top Lock Brake (T)

Other Options

Thread Gaurds	G
Zerk Axle	Z
Directional Lock	P


Fastening Options (Replace ** in part number with desired plate or stem code)

Plate Code	Overall Size	Bolt Hole Pattern		Mounting Bolt Size		
06	2-3/8 x 3-5/8	1-3/4 x 2-7/8 slotted to 3		5/16		
11	3-1/8 x 4-1/8	1-3/4 x 2-15/16 slotted to 2-3/8 x 3-3/8		3/8		
Order modular stems installed with stem code -or uninstalled by part#				Permanently attached stems		
Stem Code	Size	Stem Type	Modular Stem Part#	Stem Code	Size	Stem Type
ZZ	1/2"	Hollow kingpin - No fastener		67	1/2-13 x 1	Threaded
41	.875 x 2-1/4	Octagon w/ Grip Ring	S7STO41	68	1/2-13 x 1-1/2	Threaded
51	3/4 x 2	Square w/ 3 cross drilled holes	S7STS51	70	1-1/2-13 x 2-3/4	Threaded
57	3/4 x 2	Round w/ 3 cross drilled holes	S7STR57	71	.720 - .851	Expandable Adapter
91	7/16 x 1-3/8	Grip Ring	S7STG91	72	.852 - .927	Expandable Adapter
95	.846 x 2-3/16	Grip Ring	S7STG95	73	.928 - 1.029	Expandable Adapter
S1	1/2-13 X 4	Threaded	S7STTS1	74	1.030 - 1.140	Expandable Adapter
S2	5/8-11 x 4	Threaded	S7STTS2	75	1.360 - 1.425	Expandable Adapter
S3	3/4 -10 x 6	Threaded	S7STTS3	76	1.426 - 1.589	Expandable Adapter
S4	3/4-10 x 8	Threaded	S7STTS4	77	1.790 - 1.850	Expandable Adapter
S5	3/4-10 10	Threaded	S7STTS5			



S7 / S8 / S9 Total-Lock Stainless Steel Series

Durable Superior Casters®

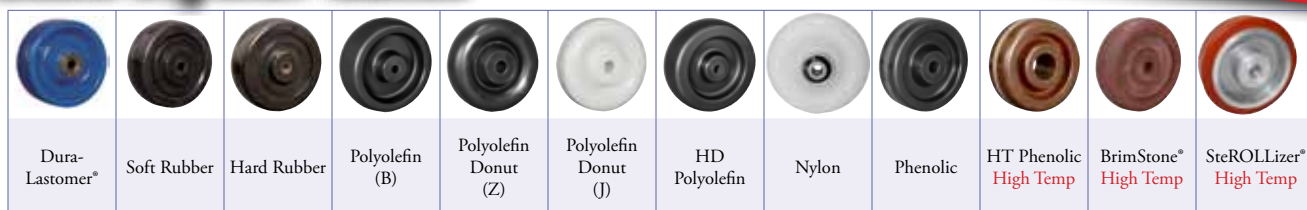

Wheel Diameter	Tread Width	Wheel Type	Load Capacity	Bearing Type	Total-Lock Swivel Caster Part#	Swivel Radius	Rigid Caster Part#	Swivel Radius	Swivel Caster Part#	Overall Height	+Color
3	1-1/4	Soft Rubber	175	Plain	S7SR30GB82**YY	4-3/8	S8SR30GB82**YY	3	S9SR30GB82**YY	*4-1/4	
		Thermo-Pro™	210	† Ball	S7TP30GI44**YY		S8TP30GI44**YY		S9TP30GI44**YY		T,Y
		Thermo-Pro™	210	† Ball	S7TP30G+47**YY		S8TP30G+47**YY		S9TP30G+47**YY		K,W
		Thermo-Pro™	210	Sleeve	S7TP30G+90**YY		S8TP30G+90**YY		S9TP30G+90**YY		T,Y
		Poly-Pro™	250	† Ball	S7PP30G+44**YY		S8PP30G+44**YY		S9PP30G+44**YY		A,D,I,S,V
		Poly-Pro™	250	Delrin	S7PP30G+55**YY		S8PP30G+55**YY		S9PP30G+55**YY		K,W
		Poly-Pro™	250	† Ball	S7PP30G+47**YY		S8PP30G+47**YY		S9PP30G+47**YY		T,Y,W
		Poly-Pro™	250	Sleeve	S7PP30G+90**YY		S8PP30G+90**YY		S9PP30G+90**YY		T,Y
		DuraLastomer®	300	Sleeve	S7SU30GL90**YY		S8SU30GL90**YY		S9SU30GL90**YY		
		Hard Rubber	275	Plain	S7HR30GB82**YY		S8HR30GB82**YY		S9HR30GB82**YY		
		Polyolefin	250	Plain	S7PO30G+82**YY		S8PO30G+82**YY		S9PO30G+82**YY		B,Z
		Polyolefin	300	Sleeve	S7PO30G+90**YY		S8PO30G+90**YY		S9PO30G+90**YY		J,Z
		H.D Polyolefin	300	Plain	S7HP30G+82**YY		S8HP30G+82**YY		S9HP30G+82**YY		B, E
		Nylon	300	Plain	S7NY30GE82**YY		S8NY30GE82**YY		S9NY30GE82**YY		
		Phenolic	300	SS Top Hats	S7PH30GB97**YY		S8PH30GB97**YY		S9PH30GB97**YY		
		H.T. Phenolic	200	SS Top Hats	S7HT30GQ97**YY		S8HT30GQ97**YY		S9HT30GQ97**YY		
BrimStone®	350	SS Top Hats	S7GN30GQ97**YY	S8GN30GQ97**YY	S9GN30GQ97**YY						
Phenolic	350	Sleeve	S7PH30HB90**YY	S8PH30HB90**YY	S9PH30HB90**YY						
3-1/2	1-1/4	Soft Rubber	200	Plain	S7SR35GB82**YY	4-3/8	S8SR35GB82**YY	3-3/16	S9SR35GB82**YY	*4-3/4	
		Thermo-Pro™	230	† Ball	S7TP35GI44**YY		S8TP35GI44**YY		S9TP35GI44**YY		T,Y
		Thermo-Pro™	230	† Ball	S7TP35G+47**YY		S8TP35G+47**YY		S9TP35G+47**YY		T,Y
		Thermo-Pro™	230	Sleeve	S7TP35G+90**YY		S8TP35G+90**YY		S9TP35G+90**YY		
		Poly-Pro™	250	† Ball	S7PP35G+44**YY		S8PP35G+44**YY		S9PP35G+44**YY		A,D,I,K,S,V
		Poly-Pro™	250	Delrin	S7PP35G+55**YY		S8PP35G+55**YY		S9PP35G+55**YY		K,W
		Poly-Pro™	250	† Ball	S7PP35G+47**YY		S8PP35G+47**YY		S9PP35G+47**YY		T,W,Y
		Poly-Pro™	250	Sleeve	S7PP35G+90**YY		S8PP35G+90**YY		S9PP35G+90**YY		T,Y
		Hard Rubber	285	Plain	S7HR35GB82**YY		S8HR35GB82**YY		S9HR35GB82**YY		
		Polyolefin	300	Plain	S7PO35G+82**YY		S8PO35G+82**YY		S9PO35G+82**YY		B,Z
		Polyolefin	300	Sleeve	S7PO35GJ90**YY		S8PO35GJ90**YY		S9PO35GJ90**YY		
		Phenolic	350	SS Top Hats	S7PH35GB97**YY		S8PH35GB97**YY		S9PH35GB97**YY		
4	1-1/4	Soft Rubber	220	Plain	S7SR40GB82**YY	4-3/8	S8SR40GB82**YY	3-1/2	S9SR40GB82**YY	*5-1/4	
		Thermo-Pro™	250	† Ball	S7TP40GI44**YY		S8TP40GI44**YY		S9TP40GI44**YY		T,Y
		Thermo-Pro™	250	† Ball	S7TP40G+47**YY		S8TP40G+47**YY		S9TP40G+47**YY		T,Y
		Thermo-Pro™	250	Sleeve	S7TP40G+90**YY		S8TP40G+90**YY		S9TP40G+90**YY		
		Poly-Pro™	300	† Ball	S7PP40G+44**YY		S8PP40G+44**YY		S9PP40G+44**YY		A,D,I,S,V
		Poly-Pro™	300	Delrin	S7PP40G+55**YY		S8PP40G+55**YY		S9PP40G+55**YY		K,W
		Poly-Pro™	300	† Ball	S7PP40G42**YY		S8PP40G42**YY		S9PP40G42**YY		
		Poly-Pro™	300	† Ball	S7PP40G+47**YY		S8PP40G+47**YY		S9PP40G+47**YY		T,W,Y
		Poly-Pro™	300	Sleeve	S7PP40G+90**YY		S8PP40G+90**YY		S9PP40G+90**YY		T,Y
		DuraLastomer®	350	Sleeve	S7SU40GL90**YY		S8SU40GL90**YY		S9SU40GL90**YY		
		Hard Rubber	300	Plain	S7HR40GB82**YY		S8HR40GB82**YY		S9HR40GB82**YY		
		Polyolefin	300	Plain	S7PO40G+82**YY		S8PO40G+82**YY		S9PO40G+82**YY		B,Z
		Polyolefin	350	Sleeve	S7PO40G+90**YY		S8PO40G+90**YY		S9PO40G+90**YY		J,Z
		H.D Polyolefin	350	Plain	S7HP40G+82**YY		S8HP40G+82**YY		S9HP40G+82**YY		B,E,Z
		Nylon	350	Sleeve	S7NY40GE90**YY		S8NY40GE90**YY		S9NY40GE90**YY		
		Phenolic	350	SS Top Hats	S7PH40GB97**YY		S8PH40GB97**YY		S9PH40GB97**YY		
	H.T. Phenolic	200	SS Top Hats	S7HT40GQ97**YY	S8HT40GQ97**YY	S9HT40GQ97**YY					
	BrimStone®	300	SS Top Hats	S7GN40GQ97**YY	S8GN40GQ97**YY	S9GN40GQ97**YY					
	SteROLLizer®	200	SS Top Hats	S7SL40GC97**YZ	S8SL40GC97**YZ	S9SL40GC97**YZ					
	1-1/2	H.T. Phenolic	350	Sleeve	S7HT40HQ90**YY	S8HT40HQ90**YY	S9HT40HQ90**YY				
BrimStone®		350	Sleeve	S7GN40HQ90**YY	S8GN40HQ90**YY	S9GN40HQ90**YY	*5-1/4				
SteROLLizer®		250	SS Prec. BB	S7SL40HC62**YY	S8SL40HC62**YY	S9SL40HC62**YY					
5	1-1/4	Soft Rubber	250	Plain	S7SR50GB82**YY	4-3/8	S8SR50GB82**YY	4	S9SR50GB82**YY	*6-1/4	
		Thermo-Pro™	300	† Ball	S7TP50GI44**YY		S8TP50GI44**YY		S9TP50GI44**YY		T,Y
		Thermo-Pro™	300	† Ball	S7TP50G+47**YY		S8TP50G+47**YY		S9TP50G+47**YY		T,Y
		Thermo-Pro™	300	Sleeve	S7TP50G+90**YY		S8TP50G+90**YY		S9TP50G+90**YY		
		Poly-Pro™	300	† Ball	S7PP50G+44**YY		S8PP50G+44**YY		S9PP50G+44**YY		A,D,I,S,V
		Poly-Pro™	300	Delrin	S7PP50G+55**YY		S8PP50G+55**YY		S9PP50G+55**YY		K,W
		Poly-Pro™	300	† Ball	S7PP50GP42**YY		S8PP50GP42**YY		S9PP50GP42**YY		
		Poly-Pro™	300	† Ball	S7PP50G+47**YY		S8PP50G+47**YY		S9PP50G+47**YY		T,W,Y
		Poly-Pro™	300	Sleeve	S7PP50G+90**YY		S8PP50G+90**YY		S9PP50G+90**YY		T,Y
		DuraLastomer®	350	Sleeve	S7SU50GL90**YY		S8SU50GL90**YY		S9SU50GL90**YY		
		Hard Rubber	325	Plain	S7HR50GB82**YY		S8HR50GB82**YY		S9HR50GB82**YY		
		Polyolefin	350	Plain	S7PO50G+82**YY		S8PO50G+82**YY		S9PO50G+82**YY		
		Polyolefin	350	Sleeve	S7PO50G+90**YY		S8PO50G+90**YY		S9PO50G+90**YY		J,Z
		H.D Polyolefin	350	Plain	S7HP50G+82**YY		S8HP50G+82**YY		S9HP50G+82**YY		B,E
		Nylon	350	Sleeve	S7NY50GE90**YY		S8NY50GE90**YY		S9NY50GE90**YY		
		Phenolic	350	SS Top Hats	S7PH50GB97**YY		S8PH50GB97**YY		S9PH50GB97**YY		
	H.T. Phenolic	350	SS Top Hats	S7HT50GQ97**YY	S8HT50GQ97**YY	S9HT50GQ97**YY					
	BrimStone®	350	SS Top Hats	S7GN50GQ97**YY	S8GN50GQ97**YY	S9GN50GQ97**YY					

† Non-stainless bearing in wheel

*Reduce overall height 1/8 for stem casters